





# SRK35ZS-W / SRC35ZS-W2

3.5(0.9~4.0) Outdoor Unit: SRC35ZS-W2 Indoor Unit: SRK35ZS-W

## **Specifications**



Indoor unit				SRK35ZS-W		
Outdoor unit				SRC35ZS-W2		
Power source				1Phase, 220 - 240, 50Hz		
Nominal cooling capacity (Min~Max)			kW	3.5(0.9~4.0)		
Nominal heating capacity (Min~Max)			kW	4.0(0.9~5.0)		
Power consumption Cooling/Heating		kW	0.89 / 0.94			
EER/COP Cooling/Heating		Cooling/Heating		3.93 / 4.26		
Max. running current		Α	9			
Sound power level	Indoor	Cooling/Heating	dB(A)	54 / 56		
	Outdoor	Cooling/Heating		61 / 61		
Sound pressure	la da sa	Cooling (Hi/Me/Lo/Ulo)		40 / 30 / 26 / 19		
	Indoor	Heating (Hi/Me/Lo/Ulo)		41 / 36 / 25 / 19		
icvei	Outdoor	Cooling/Heating		50 / 48		
	Indoor	Cooling (Hi/Me/Lo/Ulo)		11.3 / 8.7 / 7.0 / 5.0		
Air flow		Heating (Hi/Me/Lo/Ulo)	m3/min	12.3 / 11.0 / 7.0 / 5.6		
	Outdoor	Cooling/Heating		31.5 / 27.8		
Exterior Dimensions	Indoor	Height v Width v Donth		290 x 870 x 230		
exterior difficultions	Outdoor	Height x Width x Depth	mm	540 x 780(+62) x 290		
Net weight	Indoor / Out	door	kg	9.5 / 34.5		
Refrigerant		Type/GWP		R32 / 675		
Refrigerant		Charge	kg/TCO2Eq	0.78 / 0.527		
Refrigerant piping size Lie		Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")		
Refrigerant line (one way) length		m	Max. 20			
Vertical height differences Outdoor is higher/lo		Outdoor is higher/lower	m	Max. 10 / Max. 10		
Outdoor operating		Cooling	°C	-15~46		
temperature range		Heating		-15~24		
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1		
Energy Class (Cooling/Heating)				A++/A++		
SEER				8.40		
SCOP (Average climate)				4.70		
Pdesign (cooling/heating(@-10°C))			kW	3.50/3.00		
Annual Electricity Consumption (cooling/heating)			kWh/a	146/895		
Designated Heating Season				Average		


<sup>•</sup> The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.


<sup>•</sup> Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

<sup>• &#</sup>x27;tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
\*SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281


## **Schematics**

#### Indoor units SRK20ZS-W, 25ZS-W, 35ZS-W, 50ZS-W SRK20ZS-WB, 25ZS-WB, 35ZS-WB, 50ZS-WB SRK20ZS-WT, 25ZS-WT, 35ZS-WT, 50ZS-WT



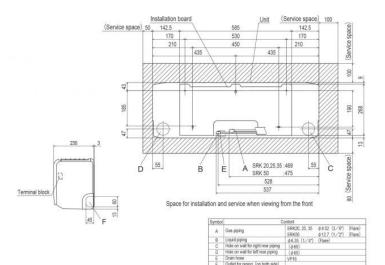

### Outdoor units SRC20ZS-W, 25ZS-W, 35ZS-W SRC25ZS-W1, 35ZS-W1 SRC25ZS-W2, 35ZS-W2



Symbol	Content						
A	Service valve connection (gas side)	ø9.52 (3/8") (Flare)					
В	Service valve connection (liquid side)	ø6.35 (1/4*) (Flare)					
C	Pipe/cable draw-out hole						
D	Drain discharge hole						
E	Anchor bolt hole	M10×4places					

Examples of installation Dimensions	1	II	Ш	N
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

