



SRK45ZSP-W / SRC45ZSP-W

4.5(1.3~4.8)

Indoor Unit : SRK45ZSP-W

Outdoor Unit : SRC45ZSP-W

Specifications



R32

Indoor unit			SRK45ZSP-W	
Outdoor unit			SRC45ZSP-W	
Power source			1 Phase, 220 - 240V, 50Hz	
Nominal cooling capacity (Min~Max)		kW	4.5(1.3~4.8)	
Nominal heating capacity (Min~Max)		kW	5.0(1.2~5.8)	
Power consumption	Cooling/Heating		kW	1.350 / 1.360
EER/COP	Cooling/Heating			3.33 / 3.68
Max. running current		A	14.5	
Sound power level	Indoor	Cooling/Heating	dB(A)	56 / 62
	Outdoor	Cooling/Heating		63 / 64
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)		44 / 39 / 24
		Heating (Hi/Me/Lo/Ulo)		48 / 41 / 30
	Outdoor	Cooling/Heating		51 / 51
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	m3/min	9.0 / 7.2 / 3.8
		Heating (Hi/Me/Lo/Ulo)		12.0 / 9.2 / 6.2
	Outdoor	Cooling/Heating		35.6 / 33.4
Exterior Dimensions	Indoor	Height x Width x Depth	mm	267 x 783 x 210
	Outdoor			595 x 780(+62) x 290
Net weight	Indoor / Outdoor		kg	7.5 / 36.0
Refrigerant	Type/GWP			R32 / 675
Refrigerant	Charge		kg/TCO2Eq	1.10 / 0.743
Refrigerant piping size	Liquid/Gas		ø mm	6.35(1/4") / 12.7(1/2"
Refrigerant line (one way) length		m	Max. 25	
Vertical height differences		Outdoor is higher/lower	m	Max. 15 / Max. 15
Outdoor operating temperature range	Cooling		°C	-15~46
	Heating			-15~24
Clean filter			-	
Energy Class (Cooling/Heating)			A+ +/A+	
SEER			6.30	
SCOP (Average climate)			4.20	
Pdesign (cooling/heating(@-10°C))		kW	4.50/3.80	
Annual Electricity Consumption (cooling/heating)		kWh/a	251/1269	
Designated Heating Season			Average	

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 - Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 - 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
- *SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281


Schematics

SRK25ZSP-W SRK35ZSP-W SRK45ZSP-W
SRK25ZSP-S SRK35ZSP-S SRK45ZSP-S

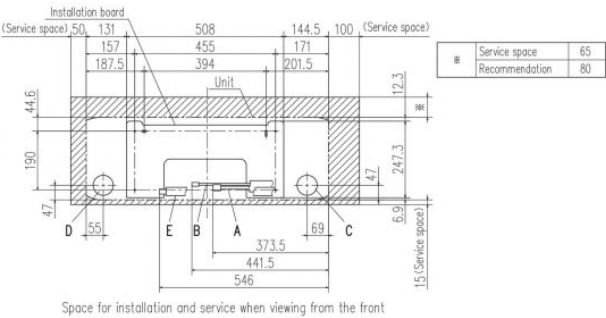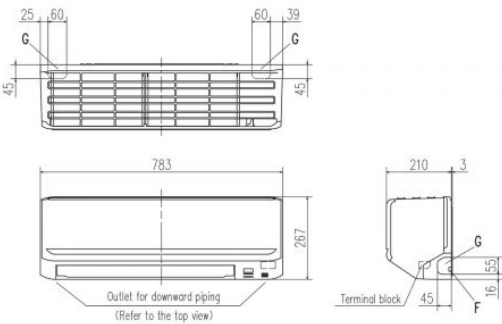

Symbol	Content
A	Gas piping
B	Liquid piping
C	Hole on wall for right rear piping
D	Hole on wall for left rear piping
E	Drain hose
F	Outlet for wiring
G	Outlet for piping (on both side)

SRC25ZSP-W SRC25ZSP-S SRC35ZSP-W SRC35ZSP-S

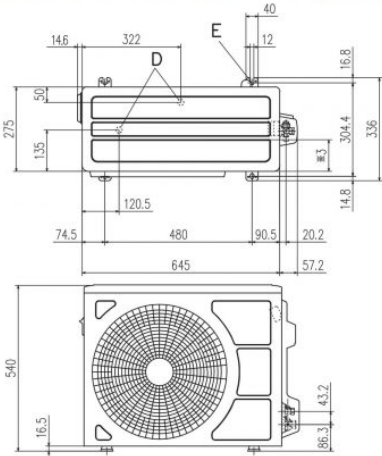

Symbol	Content
A	Service valve connection (gas side)
B	Service valve connection (liquid side)
C	Pipe/cable draw-out hole
D	Drain discharge hole
E	Anchor bolt hole

Examples of installation dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	100	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

