





SRK25ZS-W / SRC25ZS-W2

Outdoor Unit: SRC25ZS-W2 2.5(0.9~3.1) Indoor Unit: SRK25ZS-W

Specifications



Indoor unit				SRK25ZS-W		
Outdoor unit				SRC25ZS-W2		
Power source				1Phase, 220 - 240, 50Hz		
Nominal cooling capacity (Min~Max)			kW	2.5(0.9~3.1)		
Nominal heating capacity (Min~Max)		kW	3.2(0.9~4.5)			
Power consumption Cooling/Heating		kW	0.62 / 0.74			
EER/COP Cooling/Heating			4.03 / 4.32			
Max. running current		Α	9			
Sound power level	Indoor	Cooling/Heating		50 / 53		
	Outdoor	Cooling/Heating		56 / 58		
	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	36 / 28 / 23 / 19		
Sound pressure level	IIIuuui	Heating (Hi/Me/Lo/Ulo)		39 / 30 / 24 / 19		
	Outdoor	Cooling/Heating		46 /46		
	Indoor	Cooling (Hi/Me/Lo/Ulo)		9.9 / 8.0 / 5.9 / 5.0		
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m3/min	11.3 / 8.7 / 6.7 / 5.9		
	Outdoor	Cooling/Heating		27.4 / 23.6		
Exterior Dimensions	Indoor	Height x Width x Depth		290 x 870 x 230		
Exterior Diffiensions	Outdoor	neight x width x Depth	111111	540 x 780(+62) x 290		
Net weight Indoor / Outdoor		kg	9.5 / 31.0			
Refrigerant Type/GWP			R32 / 675			
Refrigerant		Charge	kg/TCO2Eq	q 0.62 / 0.419		
Refrigerant piping size		Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")		
Refrigerant line (one way) length		m	Max. 20			
Vertical height differences Outdoor is hi		Outdoor is higher/lower	m	Max. 10 / Max. 10		
Outdoor operating		Cooling	°C	35°C (DB) ~ 24°C (WB)		
temperature range		Heating		7°C (DB) ~ 6°C (WB)		
Clean filter			Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1			
Energy Class (Cooling/Heating)				A+++/A++		
SEER				8.50		
SCOP (Average climate)				4.70		
Pdesign (cooling/heating(@-10°C))		kW	2.50/2.70			
Annual Electricity Consumption (cooling/heating)			kWh/a	103/804		
Designated Heating Season			Average			


[•] The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.


[•] Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

^{• &#}x27;tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
*SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281


Schematics

Indoor units SRK20ZS-W, 25ZS-W, 35ZS-W, 50ZS-W SRK20ZS-WB, 25ZS-WB, 35ZS-WB, 50ZS-WB SRK20ZS-WT, 25ZS-WT, 35ZS-WT, 50ZS-WT



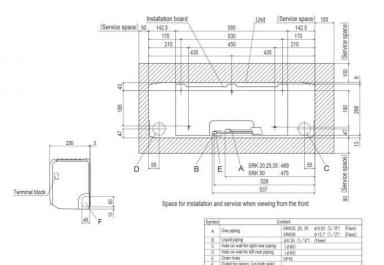

Outdoor units SRC20ZS-W, 25ZS-W, 35ZS-W SRC25ZS-W1, 35ZS-W1 SRC25ZS-W2, 35ZS-W2



Symbol	Content						
A	Service valve connection (gas side)	φ9.52 (3/8") (Flare)					
В	Service valve connection (liquid side)	#6.35 (1/4") (Flare)					
C	Pipe/cable draw-out hole						
D	Drain discharge hole	ø20×2places					
E	Anchor bolt hole	M10×4places					

Examples of installation Dimensions	1	tt	Ш	N
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

